

LINYI LUJU LEADER WOOD CO.,LTD

LEADER WOOD
CATALOG



LEADER®

By
Leader

PREMIUM WOOD SOLUTIONS FOR GLOBAL CONSTRUCTION

2026

www.Leaderwood.cn

CONTENTS

- 01 ABOUT US
- 02 PLYWOOD
- 04 FILM FACED PLYWOOD
- 06 OSB
- 08 LVL
- 09 H20 BEAM & I-Joist
- 10 3-PLY SHUTTERING PANELS
- 12 PARTICLE BOARD
- 13 MDF
- 14 Factory and Quality Inspection
- 15 BED SLATS

2026

LINYI LUJU LEADER WOOD CO.,LTD

VISION

Leader in China's wooden board industry.

MISSION

Continue to contribute our strength to the green development of the international wood industry China.

ABOUT US

PROFESSIONAL MANUFACTURER

Established in 2012, we are a leading vendor of plywood, OSB, and film faced plywood in China, committed to delivering high-quality wooden board solutions..

CERTIFICATIONS & HONORS

- AEO Authorized Economic Operator (2017)
- Certified: CE, CARB, JAS, FSC, PEFC,BSI, AS/NZS
- 6 Patents for OSB products & "LEADER" Brand IP

OUR COMMITMENT TO QUALITY

Our numerous international certifications reflect our unwavering commitment to environmental protection and product excellence.



Face/Back Veneer

Okoume, Bintangor, Sapeli, Red Pencil Cedar, EV, Pine, Birch, Ash, Maple, etc.

Core Materia

Poplar, Hardwood, Eucalyptus, Combi, etc.

Core Materia

Grade: Construction, Furniture, Packaging |

Glue: MR, Melamine, WBP(Phenolic)

Dimensions

Thickness: 2mm-30mm | Size:

1220*2440mm, 1250*2500mm or customized

Moisture Content

< 12%

PLYWOOD

Leader ply

- Standard:AS/NZS 2269.0
- Quality assurance:Certified BSI
- Finish:CD grade,on request
- Species:pine or Mixed species
- Nominal Thickness:7/9/12/15/17/19/21/25mm
- Adhesive:Phenolic formaldehyde as per AS/NZS 2754.1
- Bond Type: Type A as per AS/NZS 2098.2
- Stress Grade:F8,F11,F14,F17
- Moisture Content:12%
- Formaldehyde Emission:Super E0
- Treatment:Non-treated,H2,H3,or request

AS/NZS 2269 Structural plywood

- Leader Treated ply
- Leader Marineply
- Leader T&G-Ply
- Leader Proply
- Leader BracePly
- Leader Coverply
- Ldader TurePly
- Leader TekPLY

Structural pine plywood H3.2 Treated

Flooring Structural plywood H3.2 T&G




Okoume plywood



White Oak



HPL

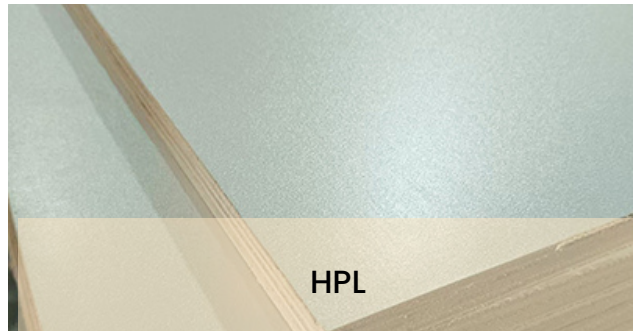

PLYWOOD

Radiata pine plywood



UV Birch Ply



Slotted Pine Plywood



Sapeli plywood





Size Options:

1220x2440mm, 1250x2500mm, 610x2440mm, 1200x1800mm, 1200x2400mm (Customizable)

Thickness:


4mm - 30mm available

Film Types:

Brown / Black / Red / Yellow / MDO / HDO

FILM FACED PLYWOOD


Grade	Core & Glue	Features	Usage Count
AAAAA	Combi Core / Dynea Film / Phenolic Glue	Boiling Water Resistant >72h	15+ Times
AAAA	Poplar Core / WBP Glue	Boiling Water Resistant >8h	8-10 Times
AAA	Poplar Core / WBP Glue	Standard Gradeh	5-7 Times
AA	Recycle Core / MR Glue	Economical Option	2-4 Times

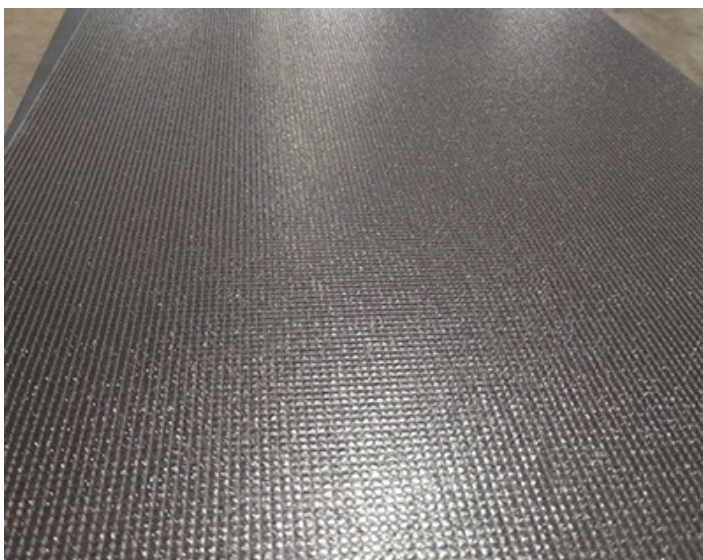

Wire mesh film faced plywood




Hexagonal Anti-slip Film Faced Ply

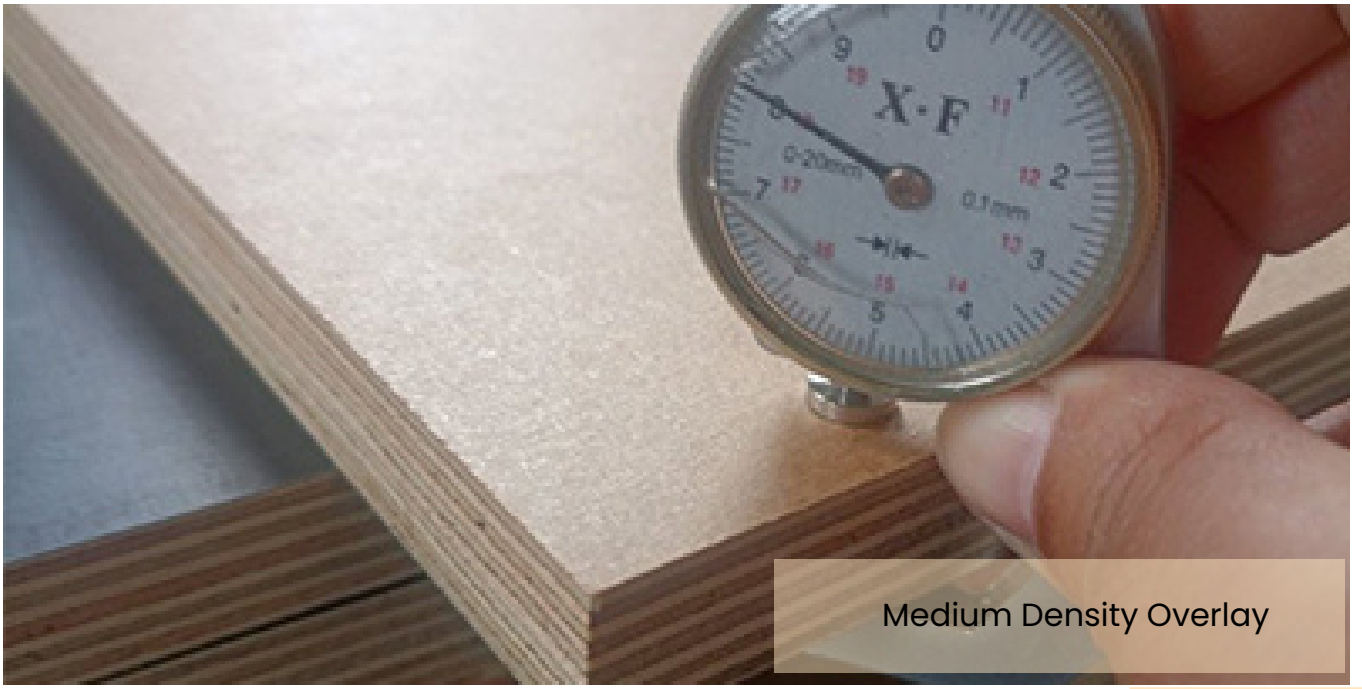


Medium Density Overlay



Flower shelf plate

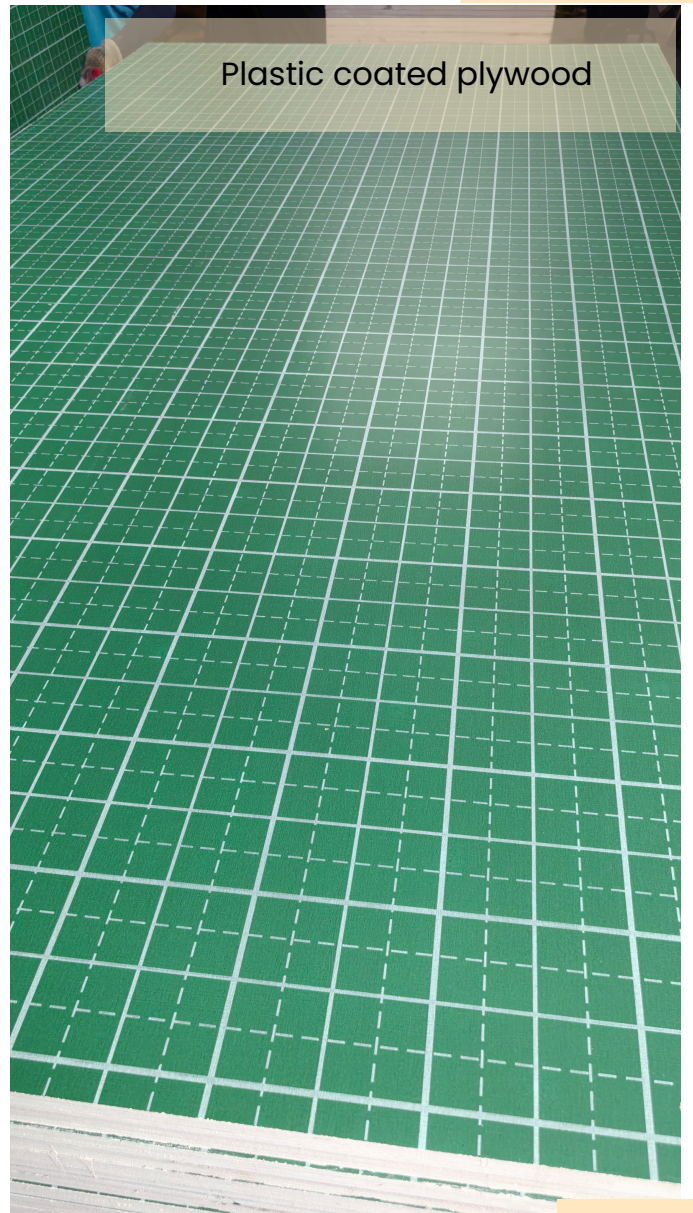

Plastic coated plywood

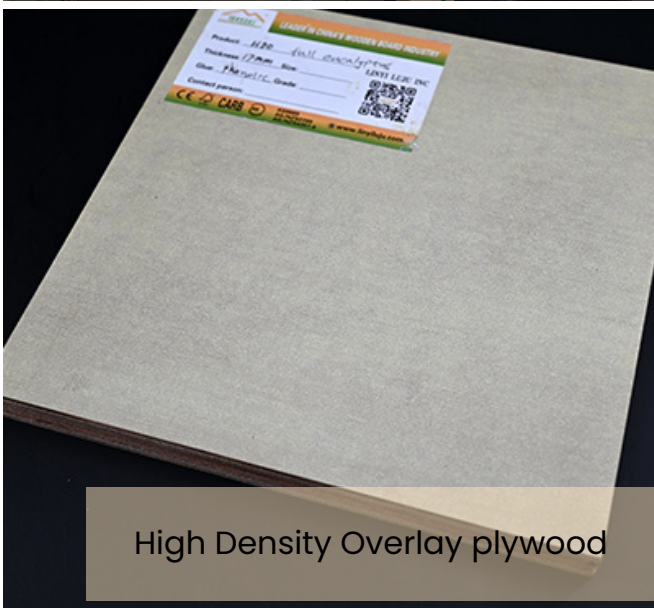

High Density Overlay plywood



OSB



Thickness: 6-36mm

Size:1220*2440mm,1250*2500mm, 915*1830mm,900*1820mm,520*1820mm,910*1820mm

Material: Poplar, Pine

Glue: Melamine, WBP(Phenolic), MDI

Moisture Content: <12%


Feature: Anti-Termites



JAS 3 OSB



JAS 4 OSB

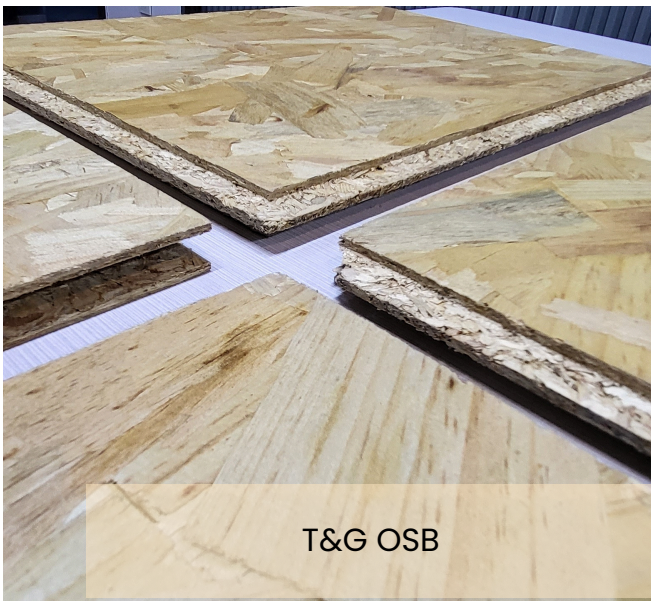

T&G OSB



Smart OSB Wall Panel

LVL (LAMINATED VENEER LUMBER)



Material: New Zealand Radiata Pine & Larch & Masson Pine


Grade: Structural Grade

Size: Width: 95x45/65, 150x77mm | Length: 1000-12000mm

Glue: A Bond Phenolic

Feature: Formwork LVL use on LVL Concrete Formwork, LVL Joists, LVL Bearers, LVLWalers, LVL Soldiers and Supports.. It is strong, lightweight, straight and uniform which will reduce forming costs and improve the quality of concrete finish.

H20 BEAM & I-JOIST

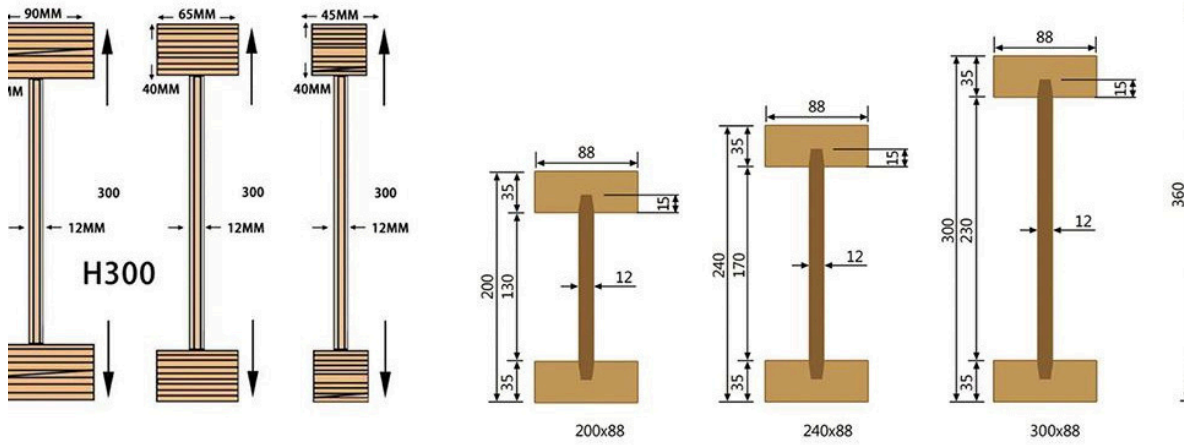

Product Name: I - Joist / H20 Beam

Material: PLY / OSB + Radiata pine / Larch pine LVL (FLANGE)

Height: 200/240/300/360mm, +/-0.5mm, or as request

Web Thickness: 10mm/12mm, +/-1mm (or as request)

Length: 1000 - 6000mm

SHUTTERING PANELS

Leader shuttering panels are high-quality, 3-ply wooden panels, made of spruce and Radiata Pine wood. The panels are fully coated with a highly resistant melamine resin, giving them excellent protection.

They are mostly used for paneling concrete constructions, but can also be used for other purposes due to their exceptional functionality. They are distinguished for their superior quality, durability and multiple use.

*Leader in China's
wooden board
industry.*



FEATURES



- **WOOD TYPE: SPRUCE, RADIATA PINE**
- **THICKNESS: 21 MM, 27 MM**
- **LENGTH: 2000/2500/2900/3000MM**
- **WIDTH: 500MM**
- **GLUE: PHENOLIC WBP, MELAMINE**
- **GRADE: AA, BB, CC**
- **EN 13986-2004+A1-2015**

Intended use: Wood-based panels for external and internal use as structural components.

EN 13353:2008 + A1:2011 Solid wood panels (SWP) Requirement.

Intended use: Wood-based panels for external and internal use as structural components.


PARTICLE BOARD




- **Standard:**ANSI A208.1
- **Material:** Full Pine / Poplar(Full Fresh Material Core)
- **Adhesive:**melamine-urea-formaldehyde or Urea-formaldehyde
- **Moisture Content:**12%+-2% at time of dispatching
- **Formaldehyde:** E1 / E0 Standard(CARB P2 and EPA TSCA Title VI)
- **Thickness:** 9-30MM
- **Standard Sizes:**1220x2440, 1525x2440, 1830x2440mm
- **Length and width:**+-2.0mm
- **Thickness:**+-0.2mm(panel average thickness from specified),+-0.1mm(Variance from panel average thickness)
- **Primary Usage:** Furniture Manufacturing




MEDIUM DENSITY FIBERBOARD

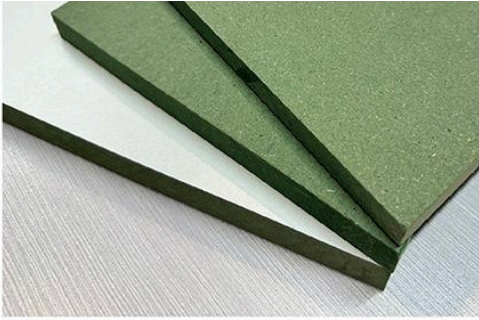

Water-Proof (HMR) MDF

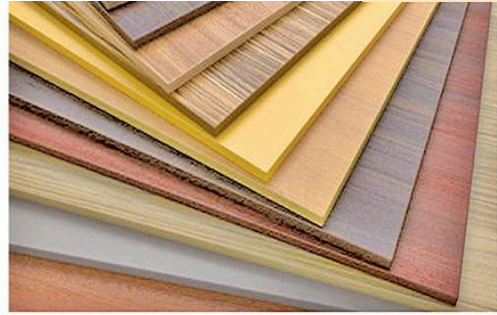

Melamine Paper MDF

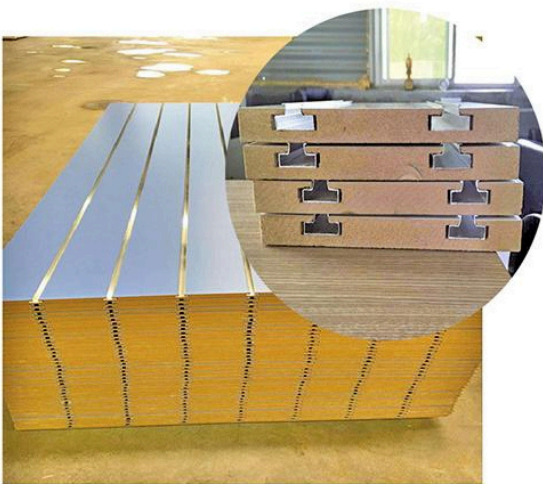

Slotted MDF

- **Material:** Full Pine / Poplar
- **Formaldehyde:** E1 / E0 Standard
- **Thickness:** 1 - 18 MM
- **Standard Sizes:** 1220x2440, 1525x2440, 1830x2440mm
- **Primary Usage:** Furniture Manufacturing



MDF of Door



FACTORY AND QUALITY INSPECTION




Raw Materials Workshop



Raw material drying



Hot Pressing

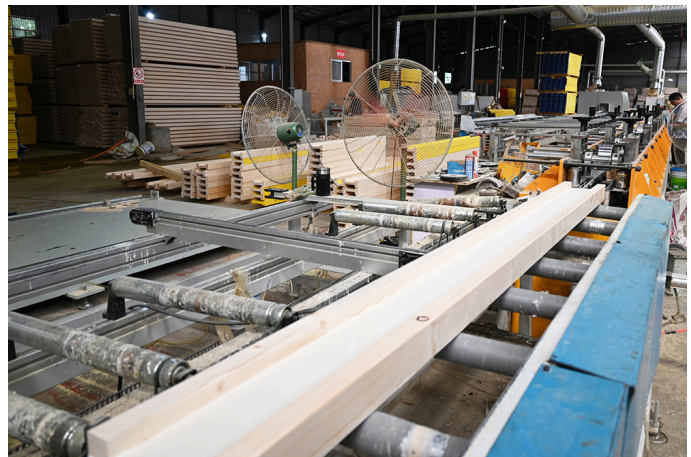

H20 Beam Production Line






LVL Production Line



Quality inspection

BED SLATS

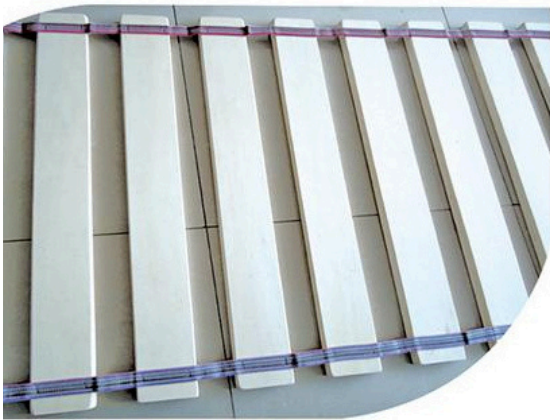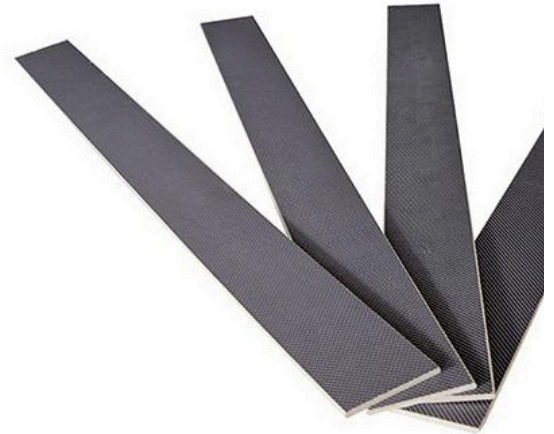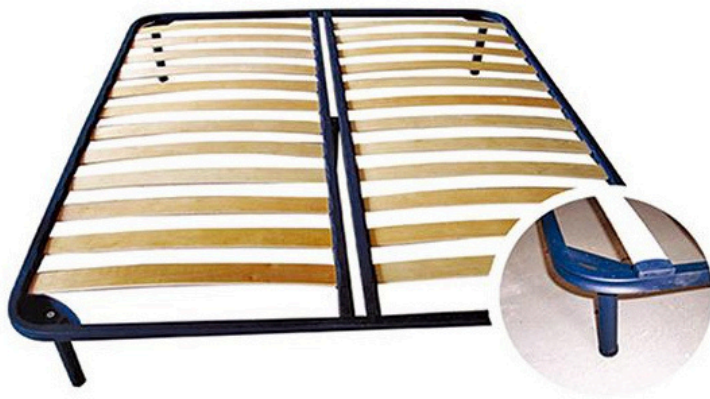

- **Length:** ≤1200mm
- **Width:** 25-90mm or customized
- **Thickness:** 8-22mm
- **Glue:** E1, E0 glue (Eco-friendly)
- **Face & Back:** Birch, poplar (UV coating)
- **Core Material:** Poplar, birch, beech

Packaging and Loading



LEADER WOOD

Linyi Luju Leader Wood Co,Ltd
Linyi City,Shandong Province,China
Sales Hotline: +86 539 7056856
Whatsapp:+86 13953907000
Email:info@linyinluju.com
website:www.leaderwood.cn
www.linyinluju.com

- **Plywood**
- **Film faced plywood**
- **OSB**
- **LVL**
- **H20 Beam&I-Joist**
- **3-PLY Shuttering Panels**
- **Particle Board**
- **MDF**
- **Bed Slats**

LEADER[®]